


Rujukan Kami: **(46) MOH/HQ/P/IKLAN-SH/2024**

BIL	Quotation Reference	Description	Advertisement Date	Closing Date (Not Later Than 02.00PM)	Quotation Fee	Requesting Department	Focal Person
9	(35) PSD/QTN/2024 – (IT)	<p>"SUPPLY AND DELIVERY, INSTALLATION, TESTING, COMMISSIONING OF NETWORK INFRASTRUCTURE AT JABATAN PERKHIDMATAN KESIHATAN ALAM SEKITAR, 2ND FLOOR, OLD WING, MOH HQ"</p> <p>REFERENCE NO: MOH/HTD/T02/2024</p> <p><u>PLACE OF SUBMISSION:</u> QUOTATION BOX (GROUND FLOOR) MINISTRY OF HEALTH COMMONWEALTH DRIVE BANDAR SERI BEGAWAN, BB 3910 NEGARA BRUNEI DARUSSALAM</p>	26/03/2024	20/04/2024	\$5.00	JABATAN TEKNOLOGI PENJAGAAN KESIHATAN, KEMENTERIAN KESIHATAN.	<p>Hajah Noor Zawatil Amal Frishah binti Haji Aji Penganalisa Sistem Bahagian Informatik Kesihatan</p> <p>Tel : 2381640 Ext : 7522</p>

SUPPLY, DELIVERY, INSTALLATION, TESTING AND COMMISSIONING OF NETWORK INFRASTRUCTURE AT JPKAS, 2ND FLR, OLD WING , MOH HQ - MOH/HTD/T02/2024								
Item	Description	Unit	Qty	Proposal from Vendor				
				Comply? (Y/N)	Please Specify the Proposed Equipment & Specification	Unit Price	Total Cost	Remarks
Technical Specifications:								
	UTP Horizontal Infrastructure Cabling							
a)	To supply and install data point using CAT6 UTP cable run in exposed PVC casing/conduit/trunking c/w modular jack, faceplate, KO box, termination, terminated by certified installer, testing, provision of test reports, labelling of cables at both ends (at patch panels and data points), maximum 90M/ run. Rack Location: 42U Rack #2 at Server Room New Points label as start from MW-N05 until MW-N64	No	60					
b)	Supply and install 1U 19-inch Cat6 UTP Patch Panel	No	3					
c)	CAT6 4-pair RJ45 patch cord cable factory terminated stranded with integrated wire management, impedance-matched, 1.5 meter long (patch panel to network switch)	No	60					
d)	Disassemble/dismantel/remove below items: >> existing network points (including faceplates, KO box etc) where possible >> existing 12U racks (including IT Equipment in the racks e.g switches, patch panels, cable managements etc) Rack Location: 12U Rack at JPKAS, 2F, Old Wing, MOH HQ. Network Points: JPKAS, 2F Flr, Old Wing, MOH HQ	Lot	1					
GRAND TOTAL:								
Terms and Conditions:								
Description				Comply? (Y/N)	Proposal from Vendor			
					Must Specify the Proposed Equipment & Specification			
Quotation Validity: 1 year								
Delivery, Installation & Commission 4 to 8 weeks								
Installation by certified installer with NETWORK CABLING SYSTEMS certification. Must provide copy of the certification.								
Cable testing MUST be using professional network tester that able to auto generate test reports/documentations Must state the details of the network tester								
Warranty :Minimum 1 Year								
Please Also Observe The Following:				Acknowledgement:			Company's Official Stamp:	
a. Fill in the form completely.				Company Ref. No.:				
b. Must state the COMPLY column				I hereby certify the above quote to be correct.				
c. Must specify the proposed equipment & specification				Signature:				
d. If fail to do above, your participation will be disqualified.				Name:				
				Designation:				

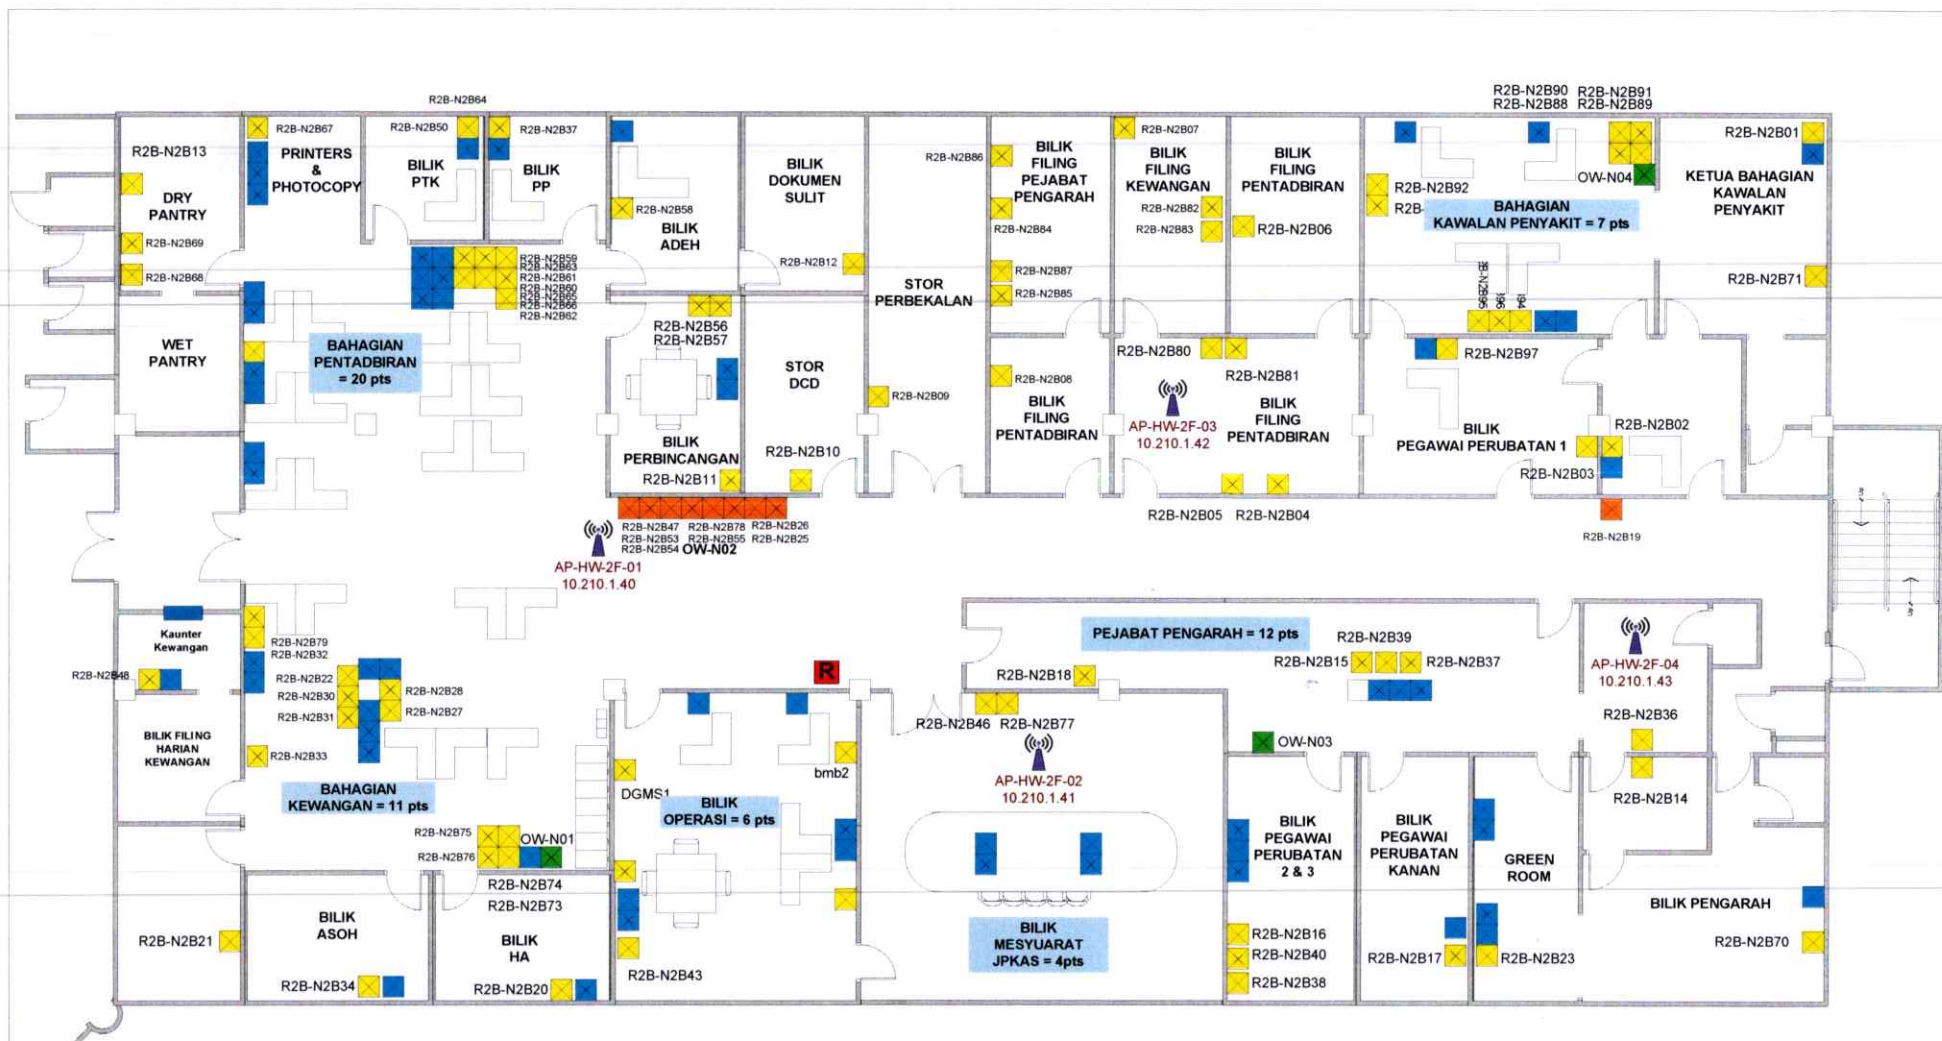

Old Wing Second Floor

Access Rack Details:

- Total Network Points: **91 pts**
- Last Data Point Label: R2B-N2B97
- Last Additional Procurement Ref: Q64-2018 and 10 units additional pts installed on sep 2018 by Azure paid by DEHS.

- Existing Rack
- MOH Network point
- Network Pts inside ceiling due to renovation
- **New Proposed Network Pts = 60 pts**
- Existing Network Point to Server Room = 4 pts
- Access point = 4 units